



ANDERSON
JUST THE RIGHT CHEMISTRY.®

Since 1911




WALL MOUNT FOAMING SYSTEMS

“WALL MOUNT FOAMING SYSTEMS” apply thick, soaking chemical foam, which stays active until rinsed.

- ▶ Foam will dwell on both vertical and horizontal surfaces to react with soil for easy removal.
- ▶ Consistent water pressure and accurate chemical dilution rates.
- ▶ Regulates incoming water pressure.
- ▶ Unlike high pressure sprayers, foam does not force itself into sensitive areas causing equipment malfunction.
- ▶ Will produce up to 50 gallons of foam per minute.
- ▶ Ability to spray foam up to 30 feet with most foaming products @ 40-80 PSI, @ 3-5 cfm.



Multi-Station Foamer

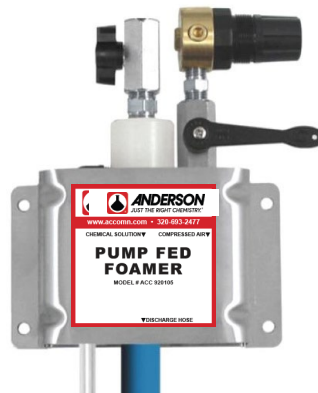

LC Foamer



Concentrate Foam Wall Unit, FI-WC



Venturi Foamer

Blue	Alkaline Products
Green	Neutral Products
Red	Acid Products
Yellow	Chlorinated Products

For additional information, please contact our Equipment Department at 800-477-8802.

Sanitation Technologies

ANDERSON CHEMICAL COMPANY
325 South Davis Avenue / Litchfield, MN 55355
800-366-2477 / www.acomn.com